

# **COCOWEB BARN LIGHT INSTALLATION MANUAL**

Rev. 4 (4/19)

## **WARNING**

Installation of lights and electrical work may present a possible shock or fire hazard if improperly installed or used. All electrical work should be performed by accordance with all federal, state and local safety regulations, and require proper grounding. All work should be performed by a certified electrician. Before starting installation, turn OFF electricity at the main fuse or circuit breaker that controls the power to the fixture/room you are working on.

Congratulations on purchasing your new quality lighting fixture from Cocoweb.com. If you have any questions about these instructions or are missing any parts, please call us at 888-783-0378 or visit [www.cocoweb.com](http://www.cocoweb.com).

### **IMPORTANT SAFETY INSTRUCTIONS:**

- Do not use with damaged electrical cords.
- Never overload an electrical circuit as it may cause shock or fire.
- Do not look directly into the light source.

### **CARE INSTRUCTIONS:**

**DO NOT** use abrasive or chemical cleaners on the light as it may damage the finish. Use only warm water, then wipe dry with a clean soft cloth.

### **TROUBLESHOOTING AND REPAIR:**

Check for damaged or worn parts before installation. Broken or damaged parts will affect the products operation. Replace or repair damaged or worn parts immediately. Should the light stop working properly and/or one of the following problems occur: (1) The lamp fails to turn on, (2) The lamp flickers, (3) The lamp dims to an unusual level, check all connections and turn the lamp back on. If the problem continues, disconnect the lamp and contact Cocoweb Customer Service.

### **COCOWEB LIMITED WARRANTY:**

Cocoweb.com warrants its products to be made of first class materials, free from defects of material or workmanship under normal use and to perform the service for which they are intended in a reliable and efficient manner when properly installed, for a period of two years from the date of purchase. During the warranty period, Cocoweb.com will, at its choice, repair or replace any part or parts which prove to be defective if returned to Cocoweb.com.

**Note: Modification of product in any way will void the warranty.**

**CAUTION** Please read this entire manual before installation and use of fixture.

**IMPORTANT - Observe all local governing codes and ordinances.**

**IMPORTANT - Save these instructions for later use.**



#### **Danger of Suffocation**

Keep packaging and small parts away from children.

# COCOWEB BARN LIGHT INSTALLATION MANUAL

## PENDANT INSTALLATION

### WARNING

Installation of lights and electrical work may present a possible shock or fire hazard if improperly installed or used. All electrical work should be performed by accordance with all federal, state and local safety regulations, and require proper grounding. All work should be performed by a certified electrician. Before starting installation, turn OFF electricity at the main fuse or circuit breaker that controls the power to the fixture/room you are working on.

**CAUTION** To avoid damaging the LED, make sure all electrical wiring is connected to the provided transformer, located inside the base of the light.

### STEP 1: PREPARING THE WIRING:

1. Feed the wiring from the shade through the front opening of the base.
  - a. If a cord adjuster was purchased, feed wire through rubber cap first, then through black opening of adjuster, then through the opening on the base.
  - b. Attach adjuster in the base by inserting metal side into opening and tighten set screws.
2. Tie a support knot inside of the base as the desired cord length.
3. (Optional) Remove excess wiring leaving about 4 to 6 inches from the knot. Remove wire insulation and strip both wires.


### STEP 2: WIRING THE LIGHT:

1. Use a wire nut to connect the brown LED driver wire to the brown LED wire from the shade.
2. Use a wire nut to connect the blue LED driver wire to the blue LED wire from the shade.
3. Use a wire nut to connect the white driver wire to the input neutral wire.
4. Use a wire nut to connect the black driver wire to the input power supply wire.
5. Use a wire nut to connect ground wire to input ground.

### STEP 3: MOUNTING THE BASE:

NOTE: This Light DOES NOT mount directly onto a junction box

1. Place the base where you would like to install the light, and carefully mark the center of each installation hole with a pen.
2. Pre-drill each hole using a 17/64 drill bit, and place one of the provided anchors in each hole.
3. Place the rubber gasket on the base, keeping the holes align, and attach to the ceiling using the provided screws.

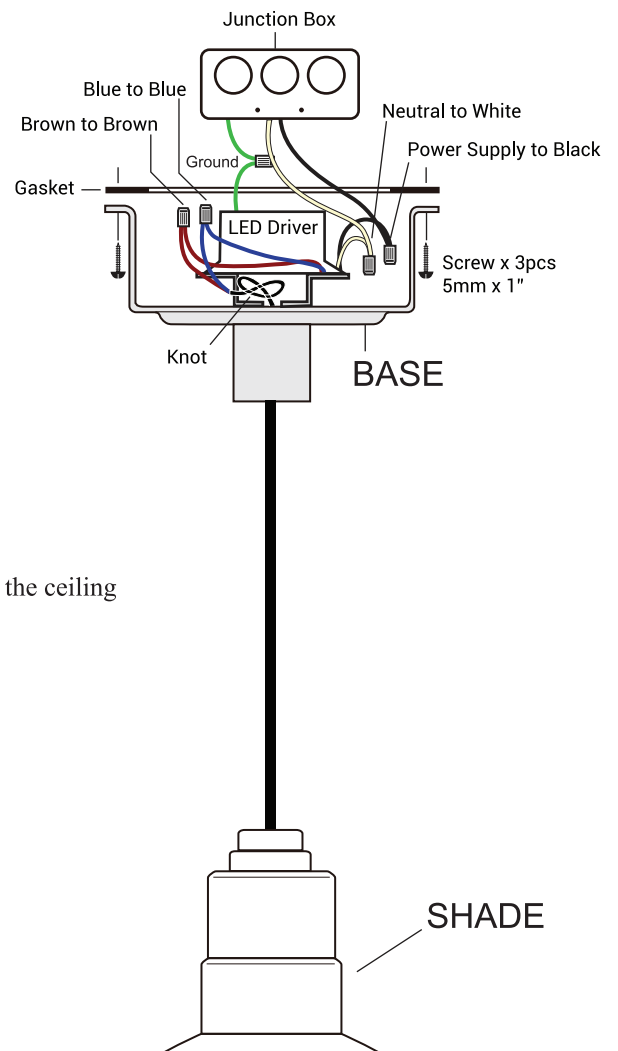

# COCOWEB BARN LIGHT INSTALLATION MANUAL

## GOOSENECK INSTALLATION

### WARNING

Installation of lights and electrical work may present a possible shock or fire hazard if improperly installed or used. All electrical work should be performed by accordance with all federal, state and local safety regulations, and require proper grounding. All work should be performed by a certified electrician. Before starting installation, turn OFF electricity at the main fuse or circuit breaker that controls the power to the fixture/room you are working on.

**CAUTION** To avoid damaging the LED, make sure all electrical wiring is connected to the provided transformer, located inside the base of the light.

### STEP 1: PREPARING THE WIRING:

1. Feed the wiring from the shade through the threaded side of the gooseneck arm.  
(Teflon tape is required on the threads of the gooseneck arm prior to installation for outdoor / damp locations.)
2. Attach the shade onto the arm by aligning the shade to the threads on the arms and rotating the shade clockwise.
3. Feed wire from arm through the front of the base.
- (Optional) Remove excess wiring leaving about 4 to 6 inches. Remove wire insulation and strip both wires.
4. Attach arm to base by inserting arm into front of the base and tighten set screws using 1/8" allen wrench.

### STEP 2: WIRING THE LIGHT:


1. Use a wire nut to connect the brown LED driver wire to the brown LED wire from the shade.
2. Use a wire nut to connect the blue LED driver wire to the blue LED wire from the shade.
3. Use a wire nut to connect the white driver wire to the input neutral wire.
4. Use a wire nut to connect the black driver wire to the input power supply wire.
5. Use a wire nut to connect ground wire to input ground.

### STEP 3: MOUNTING THE BASE:

NOTE: This Light DOES NOT mount directly onto a junction box

1. Place the base where you would like to install the light, and carefully mark the center of each installation hole with a pen.
2. Pre-drill each hole using a 17/64 drill bit, and place one of the provided anchors in each hole.
3. Place the rubber gasket on the base, keeping the holes align, and attach to the wall using the provided screws.

**Note** Gooseneck arm may ship separately and arrive in a separate package. If you are missing the arm please contact customer support.

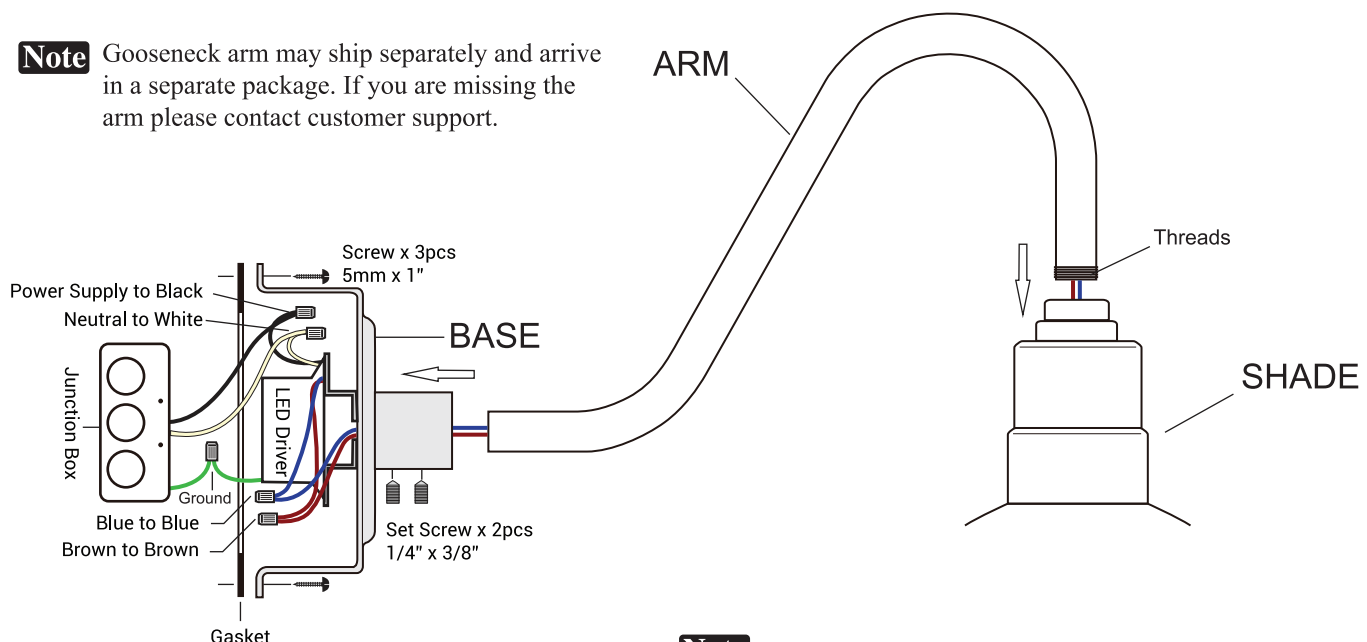

**Note** Gooseneck installation is rated for indoor or outdoor locations.